



JOHN DEERE

ENGINE PERFORMANCE CURVE

Rating: Gross Power
 Application: Industrial - Intermittent
 Power Bulge - 0%
 Torque Rise - 20%

PowerTech Plus™ 9.0 L Engine


Model: **6090HF485**

JD Electronic Control

400 hp @ 2200 rpm

298 kW @ 2200 rpm

[See Option Code Table]

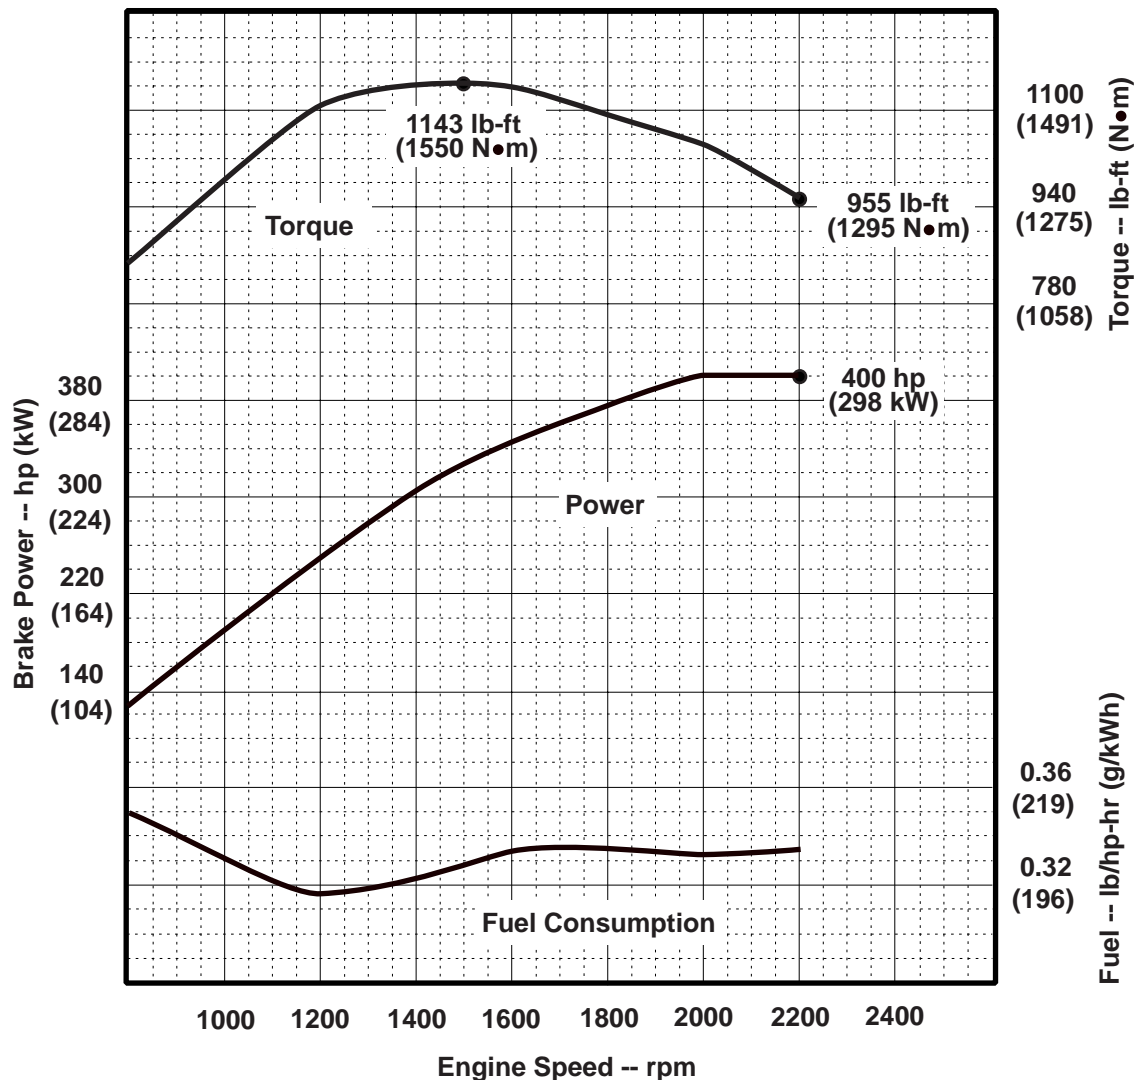

STANDARD CONDITIONS*

Air Intake Restriction 12 in.H₂O (3 kPa)
 Exhaust Back Pressure 30 in.H₂O (7.5 kPa)

Gross power guaranteed within + or - 5% at SAE J1995 and ISO 3046 conditions:
 77 °F (25 °C) air inlet temperature
 29.31 in.Hg (99 kPa) barometer
 104 °F (40 °C) fuel inlet temperature
 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Conversion factors:
 Power: kW = hp x 0.746
 Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
 Torque: N•m = lb-ft x 1.356

All values are from currently available data and are subject to change without notice.

Notes:

Restricted Rating . . . Approval from Application Engineering required.

Tier-3 Emission Certifications:	Certified by:
CARB; EPA; EU Ref: Engine Emission Label	Brian L. Carlson 15 July 2005

* Revised Data
 Curve: 6090HF485400_2200_0_20 Sheet 1 of 2
 July 2005

Engine Installation Criteria

General Data

Model 6090HF485
 Number of Cylinders 6
 Bore and Stroke--in. (mm)..... 4.661 (118.4) x 5.354 (136.0)
 Displacement--in.³ (L)..... 548 (9)
 Compression Ratio 16.0 : 1
 Valves per Cylinder--Intake/Exhaust 2 / 2
 Firing Order..... 1-5-3-6-2-4
 Combustion System..... HPCR
 Engine Type In-line, 4-Cycle
 Aspiration Turbocharged
 Charge Air Cooling System..... Air-to-Air
 Engine Crankcase Vent System Open

Physical Data

Length--in. (mm) 47.6 (1208)
 Width--in. (mm) 24.8 (630)
 Height--in. (mm) 43.8 (1113)
 Weight, dry--lb (kg) 1986 (901)
 (Includes flywheel housing, flywheel & electrics)
 Center of Gravity Location
 From Rear Face of Block(X-axis)--in.(mm) 17.1 (434.4)
 Right of Crankshaft (Y-axis)--in. (mm)..... 0.1 (2.2)
 Above Crankshaft (Z-axis)--in. (mm) 7.9 (201.4)
 Maximum Allowable Static Bending Moment at Rear Face
 of Flywhl Hsg w/ 5-G Load--lb-ft (N•m) 600 (814)
 Thrust Bearing Load Limit --lb (N) Forward Rearward
 Intermittent..... 2923 (13,000) ... 1349 (6000)
 Continuous 1933 (8600)..... 899 (4000)
 Max. Front of Crank. Torsional Vibration--DDA..... 0.25
 Max. Continuous Damper Temp--°F (°C) 180 (82)

Electrical System

12 Volt 24 Volt

Min. Battery Capacity (CCA)--amp..... 1100 750
 Max. Allow. Starting Circuit Resist.--Ohm 0.0012 0.002
 Starter Rolling Current
 At 32 °F (0 °C)--amp 920 600
 At -22 °F (-30 °C)--amp..... 1300 700
 Min. Voltage at ECU during Cranking--volts..... 6 10
 Maximum ECU Temperature--°F (°C) 221 (105)
 Max. VTG Actuator Surface Temp.--°F (°C)..... 356 (180)
 Maximum Harness Temperature--°F (°C) 257 (125)

Air System

Maximum Allowable Temp Rise--Ambient Air to
 Engine Inlet--°F (°C) 15 (8)
 Maximum Air Intake Restriction:
 Dirty Air Cleaner--in. H₂O (kPa)..... 25 (6.25)
 Clean Air Cleaner--in. H₂O (kPa)..... 15 (3.75)
 Engine Air Flow--ft³/min (m³/min) 825 (23.37)
 Air Cleaner Efficiency--% 99.9

Charge Air Cooling System

Air/Air Exch'r. Heat Rej.--Btu/min(kW) 3910 (68.7)
 Compressor Discharge Temp.(Rated)
 @ 77 °F (25°C) Ambient Air--°F (°C)..... 406 (207.6)
 Compressor Discharge Temp.(Max.) @ Peak Torque,
 47°C ambient, 80 kPa barometer--°F (°C) 500 (260)
 Max. Pressure Drop, thru CAC--in.H₂O (kPa) 64 (16)
 Min. Pressure Drop, thru CAC--in.H₂O (kPa) 32 (8)
 Intake Manifold Pressure--psi (kPa) 33 (226)
 Max CAC Out Temp @ 77°F (25°C) Amb.--°F (°C) 127(53)
 Min CAC Out Temp @ 77°F (25°C) Amb.--°F (°C) 122(49.9)
 Max CAC Out Temp @ any Ambient--°F (°C) 190(88)

Cooling System

Engine Heat Rejection--BTU/min (kW) 7291 (128.1)
 Coolant Flow--gal/min (L/min)..... 103 (390)
 Thermostat Start to Open--°F (°C)..... 180 (82)
 Thermostat Fully Open--°F (°C)..... 201 (94)
 Engine Coolant Capacity--qt (L) 17 (16)
 Minimum Pressure Cap--psi (kPa)..... 14.5 (100)
 Maximum Top Tank Temp--°F (°C) 230 (110)
 Minimum Coolant Fill Rate--gal/min (L/min) 3 (12)
 Minimum Air-to-Boil Temperature--°F (°C)..... 117 (47)
 Minimum Pump Inlet Pressure--psi (kPa) 4.4 (30)
 Max. Radiator System Restriction--in. H₂O (kPa).... 5.6 (14)

Exhaust System

Exhaust Flow--ft³/min (m³/min)..... 1878 (53)
 Exhaust Temperature--°F (°C)..... 816 (436)
 Max. Allowable Back Pressure--in. H₂O (kPa) 40 (10)
 Minimum Exhaust Restriction---in. H₂O (kPa) 16 (4)
 Max. Bend. Moment on Turbo Out.--lb-ft (N•m) 5.2 (7)
 Max. Shear on Turbo Outlet--lb (kg) 24 (11)

Fuel System

ECU Description L14 Controller
 Fuel Injection Pump Denso HP4
 Governor Type.....Electronic
 Total Fuel Flow--lb/hr (kg/hr) 450 (204.0)
 Fuel Consumption--lb/hr (kg/hr)..... 135 (61.4)
 Max. Fuel Inlet Temperature--°F (°C)..... 176 (80)
 Fuel Temp. Rise, Inlet to Return--°F (°C) 97.2 (54)
 Max. Fuel Inlet Restriction--in. H₂O (kPa) 80 (20)
 Max. Fuel Inlet Pressure--in. H₂O (kPa) 80 (20)
 Max. Fuel Return Pressure--in. H₂O (kPa) 80 (20)

Lubrication System

Oil Pressure at Rated Speed--psi (kPa) 42 (290)
 Oil Pressure at Low Idle--psi (kPa) 25 (170)
 Max. Oil Carryover in Blow-by--lb/hr (g/hr) 0.007 (3)
 Max. Airflow in Blow-by--gal/min (l/min)..... 40 (150)
 Max. Crankcase Pressure--in. H₂O (kPa)..... 2 (0.5)

Performance Data

Rated Power--hp (kW) 400 (298)
 Rated Speed--rpm 2200
 Breakaway Speed--rpm 2270
 Fast Idle Speed--rpm 2420
 Peak Torque--lb-ft (N•m)..... 1143 (1550)
 Peak Torque Speed--rpm 1500
 Low Idle Speed--rpm 800
 BMEP--psi (kPa) 262 (1806)
 Friction Power @ Rated Speed--hp (kW) 50 (37)
 Altitude Capability--ft (m) 10,000 (3000)*
 Ratio--Air : Fuel 25.0 : 1
 Smoke @ Rated Speed--Bosch No. 0.42
 Noise--dB(A) @ 1 m 93.7*
 Power Bulge--% 0
 Power Bulge Speed--rpm NA
 Torque Rise--% 20

Engine Speed rpm	Power hp (kW)	Torque lb-ft (N•m)	BSFC lb/hp-hr (g/kWh)
2200	400 (298)	955 (1295)	0.336 (205)
2000	400 (298)	1048 (1421)	0.333 (203)
1800	375 (280)	1095 (1485)	0.336 (204)
1600	347 (259)	1140 (1546)	0.334 (204)
1500	326 (243)	1143 (1550)	0.329 (200)
1400	304 (227)	1143 (1550)	0.322 (196)
1200	253 (189)	1106 (1500)	0.318 (194)
1000	186 (139)	981 (1330)	0.331 (202)
800	129 (96)	848 (1150)	0.350 (213)

All values at rated speed and power with standard options unless otherwise noted.

* Revised Data
 Curve: 6090HF485400_2200_0_20 Sheet 2 of 2
 July 2005