



ST 3.60 H

PORTABLE POWER

Aqualine Intens Aqualine

PRODUCT ADVANTAGES

- HONDA Professional Engine
- Automatic priming
- Offeres accessories

Zoom

For frequent use, heavy duty professional applications.

Divers

For frequent use, heavy duty professional applications.



ST 3.60 H

GENERAL SPECIFICATIONS

Range	Intens Aqualine
Guaranteed acoustic power Lw(A)	105
Noise level dB(A) - 1m	90
Noise level dB(A) - 7m	75

ENGINE SPECIFICATIONS

Engine trademark	Honda
Engine type	GX 160
Distribution	S.V.
Start	Launcher
Fuel	Petrol (unlead)
Autonomy (h)	3.40
Consumption (L/h)	0.90
Tank (L)	3.10
Oil Guard	Yes
Capacity (cm ³)	163
Oil capacity (L)	0.60

ALTERNATOR SPECIFICATIONS

PLUGS AND PANEL DESCRIPTIVE

DIMENSIONS AND WEIGHT

Lenght (cm)	50.50
Width (cm)	41.40
Height (cm)	44.80
Dry Weight (kgs)	29

PACKAGING

Packaging type	Box
Length (cm)	52
Width (cm)	42.50
Height (cm)	46.50
Pallet type	120/80
Number of box by pallet	12
Pallet height (cm)	153

ACCESSORIES SUPPLIED



Inlet filter


Screw-on connectors



Circ clips

User and maintenance manual

OPTIONS

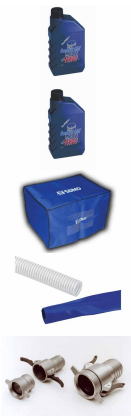

RBH1	Cans of oil RBH1	Box of 24 o.5L cans of oil or 20 1 L cans of oil (SAE 15W40)
RBH0-5	Cans of oil RBH0-5	Box of 24 0.5L cans of oil or 20 1 L cans of oil (SAE 15W40).
RHO	Protection cover RHO	Cover for SDMO generator sets and petrol or diesel driven pumps
R12	Piping kit 3	Piping kit for 3 water pumps made up of 5 m suction + 25 m lift.
R14	Rapid connectors 3	Rapid connections kit for 3 water pumps.